


XQJ槽式电缆桥架 XQJ Channel-type Support

槽式电缆桥架是一种全封闭型电缆桥架，它适用于敷设计算机、通信电缆、热电偶电缆及其它高灵敏系统的控制电缆等。它对控制电缆的屏蔽干扰和重腐蚀环境中电缆的防护都有较好的效果。

The channel-type cable support system is fully enclosed cable support system. It is applicable for laying computer cables, communication cables, thermocouple cables and control cables of highly-sensitive systems. It works well in resisting interference of control cable shield and protecting the cables in seriously corrosive environment.


XQJ-C-1A槽式直通

XQJ-C-1A Straight-way Tuough-type

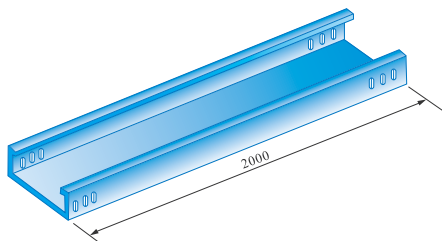


XQJ-C-2A水平弯通

XQJ-C-2A Horizontal Curved

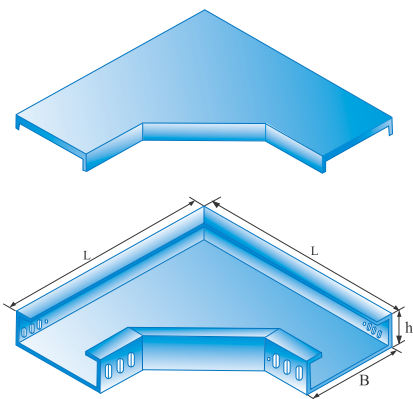

XQJ-C-3A水平三通

XQJ-C-3A Horizontal 3-Way

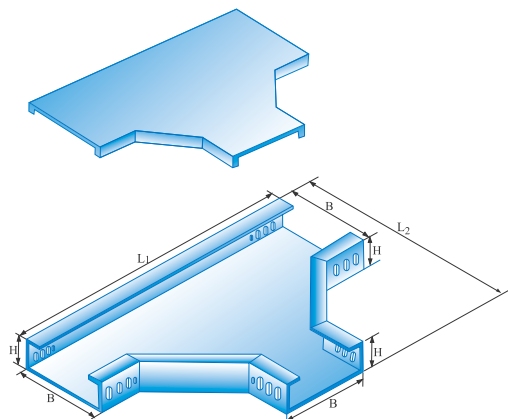

序号 NO.	型号 Model	规格 Size	重量 (kg) Weight
1	C-1A-1	50×25	6.71
2	C-1A-2	100×50	12.50
3	C-1A-3	150×75	18.27
4	C-1A-4	200×100	26.13
5	C-1A-5	250×125	40.61
6	C-1A-6	300×100	43.66
7	C-1A-7	300×150	48.73
8	C-1A-8	400×100	67.13
9	C-1A-9	400×150	73.45
10	C-1A-10	400×200	79.85
11	C-1A-11	500×100	79.66
12	C-1A-12	500×150	86.00
13	C-1A-13	500×200	92.32
14	C-1A-14	600×100	92.32
15	C-1A-15	600×150	99.47
16	C-1A-16	600×200	104.98
17	C-1A-17	800×100	156.47
18	C-1A-18	800×150	164.05
19	C-1A-19	800×200	171.36

说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

序号 NO.	型号 Model	规格 Size	L(mm)	重量 (kg) Weight
1	C-2A-1	50×25	150	1.49
2	C-2A-2	100×50	300	3.23
3	C-2A-3	150×75	350	8.44
4	C-2A-4	200×100	450	11.48
5	C-2A-5	250×125	500	13.56
6	C-2A-6	300×100	650	22.56
7	C-2A-7	300×150		27.05
8	C-2A-8	400×100	800	31.17
9	C-2A-9	400×150		37.24
10	C-2A-10	400×200		41.61
11	C-2A-11	500×100	900	43.29
12	C-2A-12	500×150		47.18
13	C-2A-13	500×200		51.37
14	C-2A-14	600×100	1000	56.21
15	C-2A-15	600×150		59.96
16	C-2A-16	600×200		62.51
17	C-2A-17	800×100	1200	69.49
18	C-2A-18	800×150		75.42
19	C-2A-19	800×200		86.55


说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

序号 NO.	型号 Model	规格 Size	L(mm)		重量 (kg) Weight
			L ₁	L ₂	
1	C-3A-1	50×25	250	150	2.50
2	C-3A-2	100×50	500	300	4.95
3	C-3A-3	150×75	550	350	11.75
4	C-3A-4	200×100	700	400	16.07
5	C-3A-5	250×125	750	500	18.60
6	C-3A-6	300×100	1000	650	26.72
7	C-3A-7	300×150			33.92
8	C-3A-8	400×100			39.12
9	C-3A-9	400×150	1200	800	48.96
10	C-3A-10	400×200			54.23
11	C-3A-11	500×100			58.42
12	C-3A-12	500×150	1300	900	61.15
13	C-3A-13	500×200			65.51
14	C-3A-14	600×100			67.14
15	C-3A-15	600×150	1400	1000	71.65
16	C-3A-16	600×200			77.70
17	C-3A-17	800×100			86.78
18	C-3A-18	800×150	1600	1200	94.46
19	C-3A-19	800×200			103.67


说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-4A水平四通
XQJ-C-4AHorizontal 4-Way

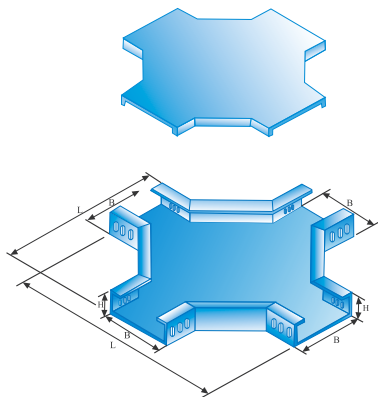

XQJ-C-4B上垂直等径四通
XQJ-C-4BVertical equal sectional Tee

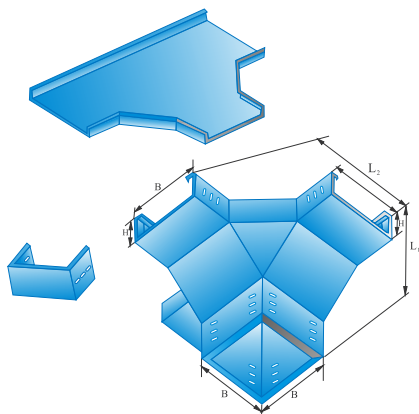

XQJ-C-06A、B、C、D型异径接头
XQJ-C-06A、B、C、D Vmodel Reducer

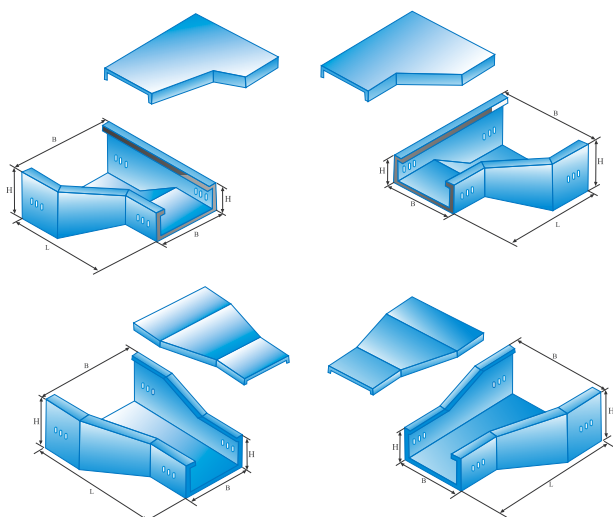

C型 C Type

D型 D type

序号 No.	型号 Model	规格 Size	L(mm)	重量 (kg) Weight
1	C-4A-1	50×25	250	2.84
2	C-4A-2	100×50	500	6.89
3	C-4A-3	150×275	550	17.06
4	C-4A-4	200×100	700	21.56
5	C-4A-5	250×125	750	24.81
6	C-4A-6	300×100	1000	34.42
7	C-4A-7	300×150	1000	43.24
8	C-4A-8	400×100	1200	48.23
9	C-4A-9	400×150	1200	60.45
10	C-4A-10	400×200	1300	67.49
11	C-4A-11	500×100	1300	69.79
12	C-4A-12	500×150	1400	73.97
13	C-4A-13	500×200	1400	79.89
14	C-4A-14	600×100	1600	80.82
15	C-4A-15	600×150	1600	81.69
16	C-4A-16	600×200	1600	93.72
17	C-4A-17	800×100	1600	97.26
18	C-4A-18	800×150	1600	108.15
19	C-4A-19	800×200	1600	114.28

说明：高度h=60、100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

序号 Number	型号 Model	规格 Size	L(mm)			重量 Weight
			L1	L2	L3	
1	C-4A-1	50×25	250	150	125	2.81
2	C-4A-2	100×50	500	300	250	5.88
3	C-4A-3	150×75	550	350	275	15.40
4	C-4A-4	200×100	700	150	350	18.97
5	C-4A-5	250×125	750	500	375	23.19
6	C-4A-6	300×100	900	600	400	30.12
7	C-4A-7	300×150	1000	650	500	42.33
8	C-4A-8	400×100	1000	750	450	39.78
9	C-4A-9	400×150	1100	750	500	50.90
10	C-4A-10	400×200	1200	800	600	66.23
11	C-4A-11	500×100	1100	800	400	69.52
12	C-4A-12	500×150	1200	850	500	72.25
13	C-4A-13	500×200	1300	900	600	78.53
14	C-4A-14	600×100	1200	900	400	81.82
15	C-4A-15	600×150	1300	950	500	85.63
16	C-4A-16	600×200	1400	1000	600	91.42
17	C-4A-17	800×100	1400	1100	400	98.62
18	C-4A-18	800×150	1500	1150	500	107.48
19	C-4A-19	800×200	1600	1200	600	118.67


说明：高度h=60、100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

型号 Model	序号 NO.	规格 Size A1×B1-A2×B2	重量 kg Weight	序号 NO.	规格 Size A1×B1-A2×B2	重量 kg Weight
C-5A	1	50×5-100×50	4.82	24	150×75-800×200	29.39
	2	50×25-150×75	5.31	25	200×100-250×125	7.01
	3	50×25-200×100	6.33	26	200×100-300×150	9.03
	4	50×25-250×125	7.19	27	200×100-400×200	14.19
	5	50×25-300×150	9.61	28	200×100-500×200	17.38
	6	50×25-400×200	14.54	29	200×100-600×200	20.93
	7	50×25-500×200	17.57	30	200×100-800×200	29.11
	8	50×25-600×200	21.15	31	250×125-300×150	8.89
	9	50×25-800×200	28.77	32	250×125-400×200	13.70
	10	100×50-150×75	5.45	33	250×125-500×200	16.96
C-5B	11	100×50-200×100	6.50	34	250×125-300×150	20.74
	12	100×50-250×125	7.34	35	250×125-300×150	28.96
C-5C	13	100×50-300×150	9.75	36	300×125-400×200	14.86
	14	100×50-400×200	14.77	37	300×125-500×200	18.19
C-5D	15	100×50-500×200	17.85	38	300×125-600×200	21.88
	16	100×50-600×200	21.29	39	300×125-800×200	30.35
	17	100×50-800×200	29.23	40	400×200-500×200	17.01
	18	150×75-200×100	6.34	41	400×200-600×200	20.86
	19	150×75-250×125	7.19	42	400×200-800×200	25.74
	20	150×75-300×150	9.61	43	400×200-600×200	18.87
	21	150×75-400×200	14.59	44	400×200-800×200	25.00
	22	150×75-500×200	17.76	45	400×200-800×200	27.51
	23	150×75-600×250	21.23			


说明：高度h=60、100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-3G下角垂直等径三通
XQJ-C-3G Downward corner vertical equal sectional Tee

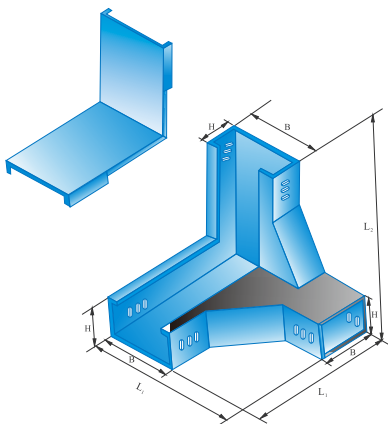

XQJ-C-3B上垂直等径三通
XQJ-C-3B Vertical equal sectional Tee

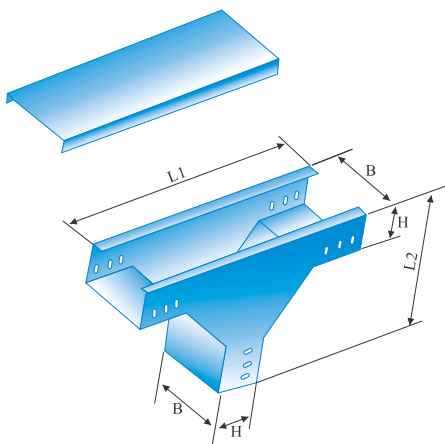

XQJ-C-3C下垂直等径三通
XQJ-C-3C Downward vertical equal sectional Tee

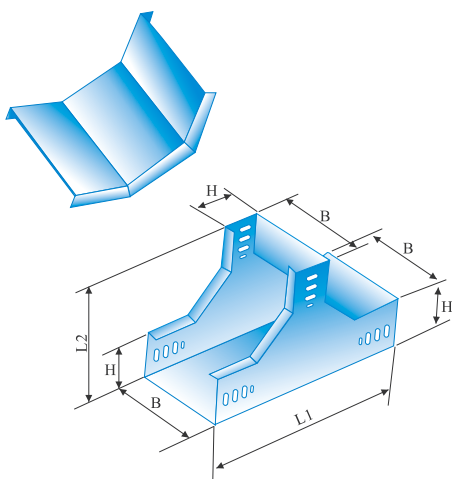

序号NO.	型号Model	规格 Size	L(mm)		重量 Weight
			L ₁	L ₂	
1	C-3G-1	50×25	150	125	2.18
2	C-3G-2	100×50	300	250	4.38
3	C-3G-3	150×75	350	275	11.49
4	C-3G-4	200×100	450	350	14.38
5	C-3G-5	250×125	500	370	15.76
6	C-3G-6	300×100	600	400	25.59
7	C-3G-7	300×150	650	500	32.90
8	C-3G-8	400×100	700	400	37.69
9	C-3G-9	400×150	750	500	42.36
10	C-3G-10	400×200	800	600	52.05
11	C-3G-11	500×100	800	400	54.54
12	C-3G-12	500×150	850	500	56.28
13	C-3G-13	500×200	900	600	62.16
14	C-3G-14	600×100	900	400	65.59
15	C-3G-15	600×150	950	500	67.38
16	C-3G-16	600×200	1000	600	72.04
17	C-3G-17	800×100	1000	400	85.12
18	C-3G-18	800×150	1150	500	87.78
19	C-3G-19	800×200	1200	600	93.46

说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

序号NO.	型号Model	规格 Size	L(mm)		重量 Weight
			L ₁	L ₂	
1	C-3B-1	50×25	225	125	2.03
2	C-3B-2	100×50	450	250	3.46
3	C-3B-3	150×75	475	275	11.47
4	C-3B-4	200×100	600	350	13.34
5	C-3B-5	250×125	625	375	16.12
6	C-3B-6	300×100	700	400	23.86
7	C-3B-7	300×150	850	500	27.12
8	C-3B-8	400×100	800	450	29.48
9	C-3B-9	400×150	850	500	31.61
10	C-3B-10	400×200	1000	600	37.22
11	C-3B-11	500×100	900	500	50.21
12	C-3B-12	500×150	950	550	52.80
13	C-3B-13	500×200	1000	600	53.41
14	C-3B-14	600×100	900	500	55.68
15	C-3B-15	600×150	950	550	58.70
16	C-3B-16	600×200	1000	600	60.04
17	C-3B-17	800×100	900	500	63.28
18	C-3B-18	800×150	950	550	67.86
19	C-3B-19	800×200	1000	600	72.40


说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

序号NO.	型号Model	规格 Size	L(mm)		重量 Weight
			L ₁	L ₂	
1	C-3C-1	50×25	225	125	2.04
2	C-3C-2	100×50	450	250	3.96
3	C-3C-3	150×75	475	275	10.85
4	C-3C-4	200×100	600	350	13.34
5	C-3C-5	250×125	625	375	16.26
6	C-3C-6	300×100	700	400	23.81
7	C-3C-7	300×150	850	500	29.96
8	C-3C-8	400×100	800	450	30.24
9	C-3C-9	400×150	850	500	35.42
10	C-3C-10	400×200	1000	600	46.54
11	C-3C-11	500×100	900	500	49.37
12	C-3C-12	500×150	950	550	50.18
13	C-3C-13	500×200	1000	600	52.61
14	C-3C-14	600×100	900	500	53.84
15	C-3C-15	600×150	950	550	55.45
16	C-3C-16	600×200	1000	600	58.78
17	C-3C-17	800×100	900	500	66.28
18	C-3C-18	800×150	950	550	68.90
19	C-3C-19	800×200	1000	600	71.24

说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-2B垂直等径上弯通
XQJ-C-2BVertical equal sectional upward bend

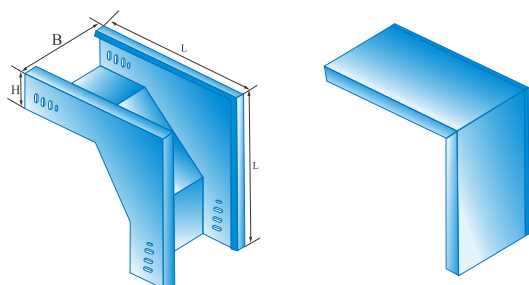

序号NO.	型号Model	规格 Size	L(mm)	重量Weight
1	C-2B-1	50×25	125	1.46
2	C-2B-2	100×50	250	3.82
3	C-2B-3	150×75	275	7.63
4	C-2B-4	200×100	350	9.62
5	C-2B-5	250×125	375	12.44
6	C-2B-6	300×100	400	18.86
7	C-2B-7	300×150	500	21.86
8	C-2B-8	400×100	400	23.89
9	C-2B-9	400×150	500	27.43
10	C-2B-10	400×200	600	32.15
11	C-2B-11	500×100	500	32.86
12	C-2B-12	500×150	600	32.62
13	C-2B-13	500×200	600	34.19
14	C-2B-14	600×100	600	41.86
15	C-2B-15	600×150	600	44.61
16	C-2B-16	600×200	600	46.90
17	C-2B-17	800×100	600	51.26
18	C-2B-18	800×150	600	53.86
19	C-2B-19	800×200	600	56.83

说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes


XQJ-C-2C垂直等径下弯通
XQJ-C-2CVertical equal sectional downward bend

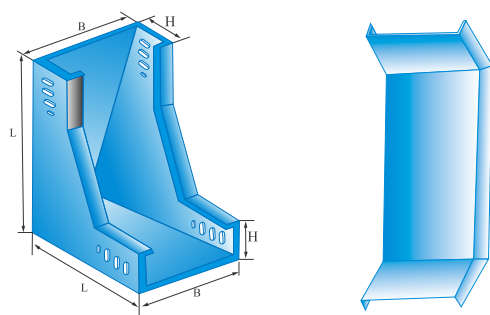

序号NO.	型号Model	规格 Size	L(mm)	重量Weight
1	C-2C-1	50×25	125	1.39
2	C-2C-2	100×50	250	3.21
3	C-2C-3	150×75	275	8.04
4	C-2C-4	200×100	350	9.74
5	C-2C-5	250×125	375	12.36
6	C-2C-6	300×100	400	15.02
7	C-2C-7	300×150	500	21.48
8	C-2C-8	400×100	400	23.40
9	C-2C-9	400×150	500	30.50
10	C-2C-10	400×200	600	36.52
11	C-2C-11	500×100	500	38.16
12	C-2C-12	500×150	600	39.21
13	C-2C-13	500×200	600	41.47
14	C-2C-14	600×100	600	43.79
15	C-2C-15	600×150	600	45.89
16	C-2C-16	600×200	600	46.32
17	C-2C-17	800×100	600	49.58
18	C-2C-18	800×150	600	53.28
19	C-2C-19	800×200	600	56.13

说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ-C-2D垂直等径左下弯通
XQJ-C-2DVertical equal sectional left downward bend

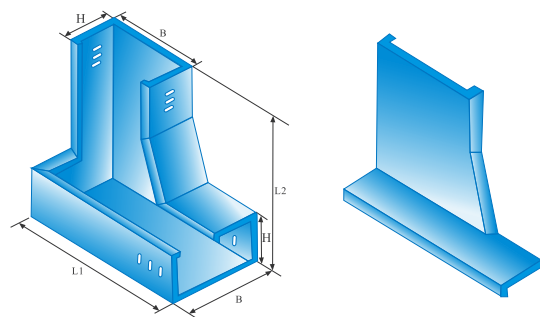


序号NO.	型号Model	规格 Size	(mm)		重量Weight
			L ₁	L ₂	
1	C-2D-1	50×25	150	125	1.37
2	C-2D-2	100×50	300	250	3.98
3	C-2D-3	150×75	350	275	7.85
4	C-2D-4	200×100	450	350	10.36
5	C-2D-5	250×125	500	375	13.21
6	C-2D-6	300×100	600	400	22.68
7	C-2D-7	300×150	650	500	24.46
8	C-2D-8	400×100	700	400	31.89
9	C-2D-9	400×150	750	500	36.20
10	C-2D-10	400×200	800	600	40.99
11	C-2D-11	500×100	800	400	45.80
12	C-2D-12	500×150	850	500	47.20
13	C-2D-13	500×200	900	600	50.53
14	C-2D-14	600×100	900	400	52.02
15	C-2D-15	600×150	950	500	56.02
16	C-2D-16	600×200	100	600	60.14
17	C-2D-17	800×100	1100	400	68.02
18	C-2D-18	800×150	1150	500	79.05
19	C-2D-19	800×200	1200	600	86.79


说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-3D上边垂直等径三通
XQJ-C-3D Upward side vertical equal sectional Tee

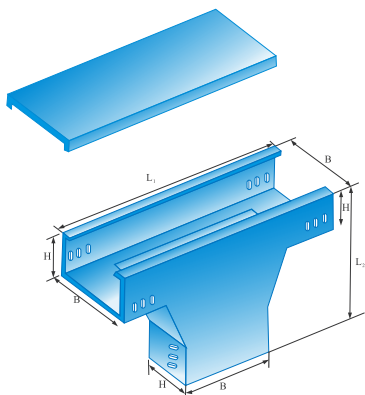

XQJ-C-3E下边垂直等径三通
XQJ-C-3E Downward side vertical equal sectional Tee

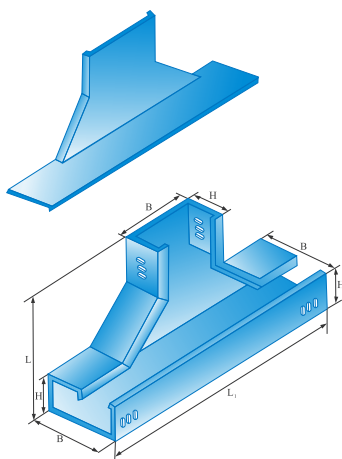

XQJ-C-3F上角垂直等径三通
XQJ-C-3F Upward corner vertical equal sectional Tee

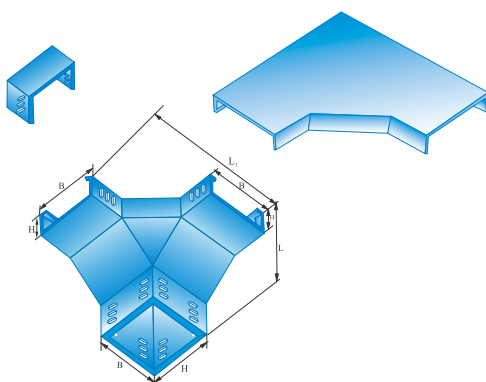

序号NO.	型号Model	规格 Size	(mm)		重量Weight
			L ₁	L ₂	
1	C-3D-1	50×25	250	125	2.21
2	C-3D-2	100×50	500	250	3.94
3	C-3D-3	150×75	550	275	11.96
4	C-3D-4	200×100	700	350	14.92
5	C-3D-5	250×125	750	375	18.30
6	C-3D-6	300×100	700	400	37.20
7	C-3D-7	300×150	1000	500	32.07
8	C-3D-8	400×100	800	450	42.80
9	C-3D-9	400×150	850	500	47.50
10	C-3D-10	400×200	1200	600	54.45
11	C-3D-11	500×100	900	500	61.30
12	C-3D-12	500×150	950	550	63.80
13	C-3D-13	500×200	1300	600	65.82
14	C-3D-14	600×100	900	500	72.10
15	C-3D-15	600×150	950	550	75.40
16	C-3D-16	600×200	1400	600	78.12
17	C-3D-17	800×100	900	500	87.50
18	C-3D-18	800×150	950	550	91.02
19	C-3D-19	800×200	1600	600	105.56

说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

序号NO.	型号Model	规格 Size	(mm)		重量 Weight
			L ₁	L ₂	
1	C-3E-1	50×25	250	125	2.23
2	C-3E-2	100×50	500	250	3.99
3	C-3E-3	150×75	550	275	11.97
4	C-3E-4	200×100	700	350	14.92
5	C-3E-5	250×125	750	375	19.02
6	C-3E-6	300×100	700	400	26.30
7	C-3E-7	300×150	1000	500	32.07
8	C-3E-8	400×100	800	450	38.20
9	C-3E-9	400×150	850	500	46.50
10	C-3E-10	400×200	1200	600	54.45
11	C-3E-11	500×100	900	500	63.40
12	C-3E-12	500×150	950	550	64.50
13	C-3E-13	500×200	1300	600	65.72
14	C-3E-14	600×100	900	500	72.80
15	C-3E-15	600×150	950	550	75.40
16	C-3E-16	600×200	1400	600	78.12
17	C-3E-17	800×100	900	500	86.30
18	C-3E-18	800×150	950	550	98.20
19	C-3E-19	800×200	1600	600	104.56


说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

序号NO.	型号Model	规格 Size	(mm)		重量Weight
			L ₁	L ₂	
1	C-3F-1	50×25	150	125	1.90
2	C-3F-2	100×50	300	250	4.23
3	C-3F-3	150×75	350	275	10.98
4	C-3F-4	200×100	450	350	14.09
5	C-3F-5	250×125	500	375	17.39
6	C-3F-6	300×100	600	400	27.56
7	C-3F-7	300×150	650	500	32.59
8	C-3F-8	400×100	700	400	40.23
9	C-3F-9	400×150	750	500	45.18
10	C-3F-10	400×200	800	600	54.52
11	C-3F-11	500×100	800	400	56.59
12	C-3F-12	500×150	850	500	62.15
13	C-3F-13	500×200	900	600	64.68
14	C-3F-14	600×100	900	400	69.87
15	C-3F-15	600×150	950	500	72.36
16	C-3F-16	600×200	1000	600	78.79
17	C-3F-17	800×100	1100	400	86.18
18	C-3F-18	800×150	1150	500	95.25
19	C-3F-19	800×200	1200	600	103.82


说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-2E垂直等径右下弯通
XQJ-C-2E Vertical equal sectional right downward bend

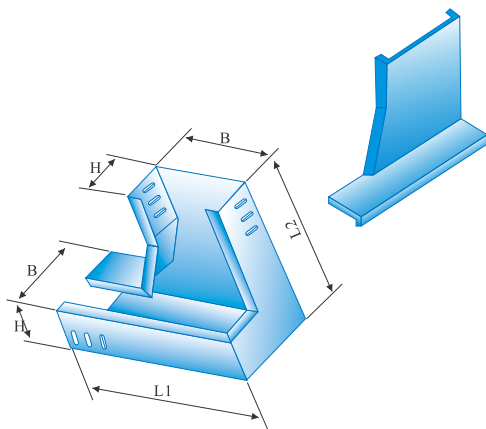

XQJ-C-2F垂直等径左上弯通
XQJ-C-2F Vertical equal sectional left upward bend

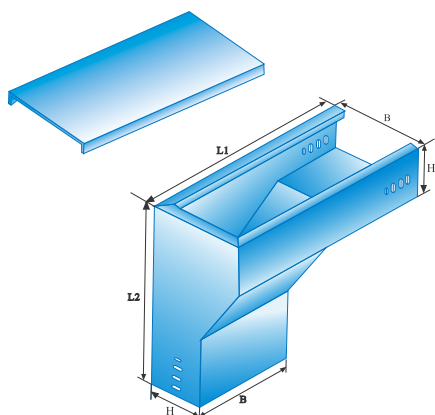

XQJ-C-2G垂直等径右上弯通
XQJ-C-2G Vertical equal sectional right upward bend

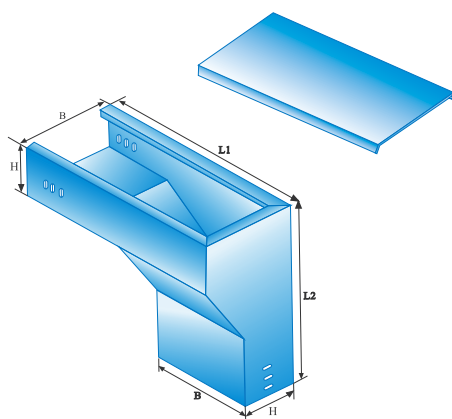

序号NO.	型号Model	规格 Size	(mm)		重量 Weight
			L ₁	L ₂	
1	C-2E-1	50×25	150	125	1.47
2	C-2E-2	100×50	300	250	3.98
3	C-2E-3	150×75	350	275	7.85
4	C-2E-4	200×100	450	350	10.43
5	C-2E-5	250×125	500	370	14.22
6	C-2E-6	300×100	600	400	21.68
7	C-2E-7	300×150	650	500	24.45
8	C-2E-8	400×100	700	400	27.89
9	C-2E-9	400×150	750	500	35.56
10	C-2E-10	400×200	800	600	40.89
11	C-2E-11	500×100	800	400	41.88
12	C-2E-12	500×150	850	500	43.12
13	C-2E-13	500×200	900	600	49.94
14	C-2E-14	600×100	900	400	50.24
15	C-2E-15	600×150	950	500	52.13
16	C-2E-16	600×200	1000	600	61.14
17	C-2E-17	800×100	1100	400	65.45
18	C-2E-18	800×150	1150	500	76.89
19	C-2E-19	800×200	1200	600	84.17

说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

序号NO.	型号Model	规格 Size	(mm)		重量 Weight
			L ₁	L ₂	
1	C-2F-1	50×25	150	100	1.73
2	C-2F-2	100×50	300	200	3.88
3	C-2F-3	150×75	350	250	7.56
4	C-2F-4	200×100	450	300	10.30
5	C-2F-5	250×125	500	350	13.56
6	C-2F-6	300×100	550	350	22.68
7	C-2F-7	300×150	650	500	24.54
8	C-2F-8	400×100	750	450	31.50
9	C-2F-9	400×150	750	500	36.20
10	C-2F-10	400×200	800	600	40.23
11	C-2F-11	500×100	900	600	52.80
12	C-2F-12	500×150	900	650	54.20
13	C-2F-13	500×200	900	700	58.69
14	C-2F-14	600×100	1000	700	63.80
15	C-2F-15	600×150	1000	750	68.20
16	C-2F-16	600×200	1000	800	72.97
17	C-2F-17	800×100	1200	900	83.20
18	C-2F-18	800×150	1200	950	92.50
19	C-2F-19	800×200	1200	1000	104.71

说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

序号NO.	型号Model	规格 Size	(mm)		重量 Weight
			L ₁	L ₂	
1	C-2G-1	50×25	150	100	1.33
2	C-2G-2	100×50	300	200	3.88
3	C-2G-3	150×75	350	250	7.56
4	C-2G-4	200×100	450	300	10.31
5	C-2G-5	250×125	500	350	13.56
6	C-2G-6	300×100	550	350	22.68
7	C-2G-7	300×150	650	500	24.54
8	C-2G-8	400×100	750	450	31.50
9	C-2G-9	400×150	750	500	36.20
10	C-2G-10	400×200	800	600	40.12
11	C-2G-11	500×100	900	600	41.80
12	C-2G-12	500×150	900	650	43.20
13	C-2G-13	500×200	900	700	46.96
14	C-2G-14	600×100	1000	700	48.80
15	C-2G-15	600×150	1000	750	52.20
16	C-2G-16	600×200	1000	800	56.72
17	C-2G-17	800×100	1200	900	61.20
18	C-2G-18	800×150	1200	950	77.50
19	C-2G-19	800×200	1200	1000	89.44

说明：高度h=60, 100为单排连接孔, 高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes