


## XQJ托盘式电缆桥架 XQJ Trayl-type Support


托盘式桥架是石油、化工、电力、电视电讯等方面最广泛应用的理想敷设装置。它具有重量轻、载荷大、造型美观、结构简单、安装方便、散热透气性好等优点。既适用于动力电缆的安装，也适用于控制电缆的敷设。

Tray-type cable support systems & are ideal cable laying devices most broadly applied in petroleum industry, chemical industry, power and light industries, television and telecommunication. It is feat used by such advantages as small weight, great loading capacity, good-loading shape, simple stucture, convenient erection, quick heat dissipation and fine permeability.


XQJ-P-01托盘直通  
XQJ-P-01Tray type straight supply

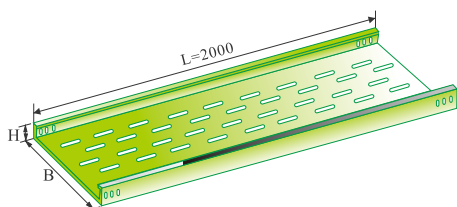

XQJ-P-02水平弯通  
XQJ-P-02Tray type horizontal bend

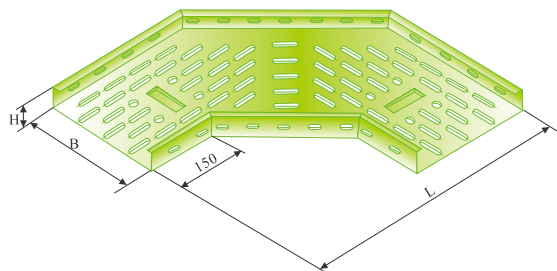

XQJ-P-03水平三通  
XQJ-P-03Tray type horizontal Tee

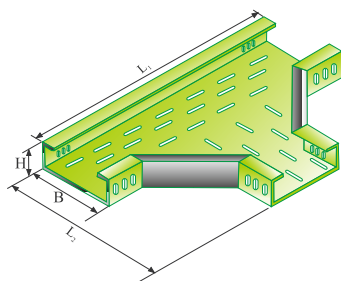

| 型号Model   | b(mm) | H(mm) | 重量Weight |
|-----------|-------|-------|----------|
| P-01-6-2  | 200   | 60    | 12.61    |
| P-01-10-2 |       | 100   | 15.58    |
| P-01-15-2 |       | 150   | 19.32    |
| P-01-20-2 |       | 200   | 31.19    |
| P-01-6-3  | 300   | 60    | 22.44    |
| P-01-10-3 |       | 100   | 26.53    |
| P-01-15-3 |       | 150   | 31.60    |
| P-01-20-3 |       | 200   | 36.66    |
| P-01-6-4  | 400   | 60    | 34.19    |
| P-01-10-4 |       | 100   | 39.29    |
| P-01-15-4 |       | 150   | 45.60    |
| P-01-20-4 |       | 200   | 51.92    |
| P-01-6-5  | 500   | 60    | 40.53    |
| P-01-10-5 |       | 100   | 45.60    |
| P-01-15-5 |       | 150   | 51.92    |
| P-01-20-5 |       | 200   | 58.26    |
| P-01-6-6  | 600   | 60    | 46.85    |
| P-01-10-6 |       | 100   | 51.92    |
| P-01-15-6 |       | 150   | 58.26    |
| P-01-20-6 |       | 200   | 64.60    |
| P-01-6-8  | 800   | 60    | 71.71    |
| P-01-10-8 |       | 100   | 77.77    |
| P-01-15-8 |       | 150   | 85.35    |
| P-01-20-8 |       | 200   | 92.94    |

说明：高度h=60，100为单排连接孔，高h=150为双排连接孔  
Description:h=60,single-row connection holes:h=150,double-row connection holes

| 型号Model   | b(mm) | H(mm) | L(mm) | 重量Weight |
|-----------|-------|-------|-------|----------|
| P-02-6-2  | 200   | 60    | 500   | 6.63     |
| P-02-10-2 |       | 100   |       | 8.03     |
| P-02-15-2 |       | 150   |       | 12.06    |
| P-02-20-2 |       | 200   |       | 15.12    |
| P-02-6-3  | 300   | 60    | 600   | 9.05     |
| P-02-10-3 |       | 100   |       | 10.99    |
| P-02-15-3 |       | 150   |       | 17.48    |
| P-02-20-3 |       | 200   |       | 19.98    |
| P-02-6-4  | 400   | 60    | 700   | 19.23    |
| P-02-10-4 |       | 100   |       | 21.80    |
| P-02-15-4 |       | 150   |       | 29.61    |
| P-02-20-4 |       | 200   |       | 33.85    |
| P-02-6-5  | 500   | 60    | 800   | 25.22    |
| P-02-10-5 |       | 100   |       | 28.19    |
| P-02-15-5 |       | 150   |       | 36.94    |
| P-02-20-5 |       | 200   |       | 41.56    |
| P-02-6-6  | 600   | 60    | 900   | 31.87    |
| P-02-10-6 |       | 100   |       | 35.07    |
| P-02-15-6 |       | 150   |       | 44.59    |
| P-02-20-6 |       | 200   |       | 49.54    |
| P-02-6-8  | 800   | 60    | 6000  | 41.87    |
| P-02-10-8 |       | 100   | 1100  | 46.80    |
| P-02-15-8 |       | 150   |       | 63.22    |
| P-02-20-8 |       | 200   | 1200  | 68.97    |

说明：高度h=60，100为单排连接孔，高h=150为双排连接孔  
Description:h=60,single-row connection holes:h=150,double-row connection holes

| 型号Model   | b(mm) | H(mm) | L <sub>1</sub> (mm) | L <sub>2</sub> (mm) | 重量Weight |
|-----------|-------|-------|---------------------|---------------------|----------|
| P-03-6-2  | 200   | 60    | 800                 | 500                 | 10.02    |
| P-03-10-2 |       | 100   |                     |                     | 14.10    |
| P-03-15-2 |       | 150   |                     |                     | 21.24    |
| P-03-20-2 |       | 200   | 1000                |                     | 25.49    |
| P-03-6-3  | 300   | 60    | 900                 | 600                 | 16.40    |
| P-03-10-3 |       | 100   |                     |                     | 18.36    |
| P-03-15-3 |       | 150   |                     |                     | 26.39    |
| P-03-20-3 |       | 200   | 1100                |                     | 30.79    |
| P-03-6-4  | 400   | 60    | 1000                | 700                 | 26.31    |
| P-03-10-4 |       | 100   |                     |                     | 29.21    |
| P-03-15-4 |       | 150   |                     |                     | 41.75    |
| P-03-20-4 |       | 200   | 1200                |                     | 47.71    |
| P-03-6-5  | 500   | 60    | 1100                | 800                 | 33.18    |
| P-03-10-5 |       | 100   |                     |                     | 36.32    |
| P-03-15-5 |       | 150   |                     |                     | 48.46    |
| P-03-20-5 |       | 200   | 1300                |                     | 54.52    |
| P-03-6-6  | 600   | 60    | 1200                | 900                 | 40.47    |
| P-03-10-6 |       | 100   |                     |                     | 43.71    |
| P-03-15-6 |       | 150   |                     |                     | 59.40    |
| P-03-20-6 |       | 200   |                     | 6000                | 66.00    |
| P-03-6-8  | 800   | 60    | 1400                |                     | 57.57    |
| P-03-10-8 |       | 100   |                     | 1100                | 60.85    |
| P-03-15-8 |       | 150   |                     |                     | 70.00    |
| P-03-20-8 |       | 200   | 1600                | 1200                | 76.68    |


说明：高度h=60，100为单排连接孔，高h=150为双排连接孔  
Description:h=60,single-row connection holes:h=150,double-row connection holes



## XQJ托盘式电缆桥架 XQJ Trayl-type Support

XQJ-P-04水平四通

XQJ-P-04Tray type horizontal Cross

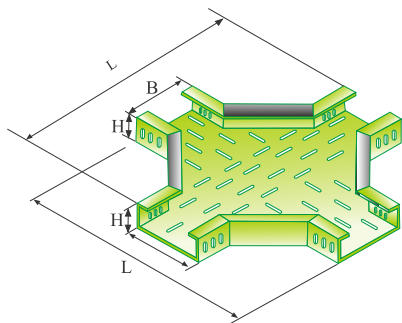


| 型号Model   | b(mm) | H(mm) | L(mm) | 重量Weight |
|-----------|-------|-------|-------|----------|
| P-04-6-2  | 200   | 60    | 800   | 12.86    |
| P-04-10-2 |       | 100   | 860   | 17.55    |
| P-04-15-2 |       | 150   | 1000  | 27.72    |
| P-04-20-2 |       | 200   |       | 32.66    |
| P-04-6-3  | 300   | 60    | 900   | 20.24    |
| P-04-10-3 |       | 100   |       | 22.35    |
| P-04-15-3 |       | 150   | 1100  | 32.51    |
| P-04-20-3 |       | 200   |       | 37.93    |
| P-04-6-4  | 400   | 60    | 1000  | 30.02    |
| P-04-10-4 |       | 100   |       | 34.41    |
| P-04-15-4 |       | 150   | 1200  | 50.46    |
| P-04-20-4 |       | 200   |       | 57.67    |
| P-04-6-5  | 500   | 60    | 1100  | 39.17    |
| P-04-10-5 |       | 100   |       | 42.47    |
| P-04-15-5 |       | 150   | 1300  | 59.31    |
| P-04-20-5 |       | 200   |       | 66.72    |
| P-04-6-6  | 600   | 60    | 1200  | 47.21    |
| P-04-10-6 |       | 100   |       | 50.53    |
| P-04-15-6 |       | 150   | 1400  | 69.03    |
| P-04-20-6 |       | 200   |       | 76.70    |
| P-04-6-8  | 800   | 60    | 1600  | 65.95    |
| P-04-10-8 |       | 100   |       | 68.58    |
| P-04-15-8 |       | 150   | 1600  | 89.91    |
| P-04-20-8 |       | 200   |       | 98.08    |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ-P-05A、B垂直凹、凸弯通

XQJ-P-05A、BTray type straight convex(concave)bend

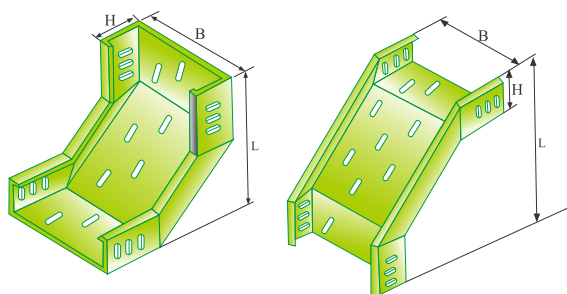


| 型号Model      | b(mm) | H(mm) | L(mm) | 重量Weight |
|--------------|-------|-------|-------|----------|
| P-05A、B-6-2  | 200   | 60    | 360   | 5.19     |
| P-05A、B-10-2 |       | 100   | 400   | 7.39     |
| P-05A、B-15-2 |       | 150   | 550   | 13.32    |
| P-05A、B-20-2 |       | 200   | 550   | 16.22    |
| P-05A、B-6-3  | 300   | 60    | 360   | 7.25     |
| P-05A、B-10-3 |       | 100   | 400   | 9.10     |
| P-05A、B-15-3 |       | 150   | 550   | 15.10    |
| P-05A、B-20-3 |       | 200   | 550   | 17.90    |
| P-05A、B-6-4  | 400   | 60    | 360   | 11.80    |
| P-05A、B-10-4 |       | 100   | 400   | 14.23    |
| P-05A、B-15-4 |       | 150   | 550   | 21.95    |
| P-05A、B-20-4 |       | 200   | 550   | 24.28    |
| P-05A、B-6-5  | 500   | 60    | 360   | 13.87    |
| P-05A、B-10-5 |       | 100   | 400   | 16.35    |
| P-05A、B-15-5 |       | 150   | 550   | 25.00    |
| P-05A、B-20-5 |       | 200   | 550   | 28.64    |
| P-05A、B-6-6  | 600   | 60    | 360   | 26.08    |
| P-05A、B-10-6 |       | 100   | 400   | 28.63    |
| P-05A、B-15-6 |       | 150   | 550   | 39.49    |
| P-05A、B-20-6 |       | 200   | 550   | 43.69    |
| P-05A、B-6-8  | 800   | 60    | 360   | 33.53    |
| P-05A、B-10-8 |       | 100   | 400   | 36.37    |
| P-05A、B-15-8 |       | 150   | 550   | 49.49    |
| P-05A、B-20-8 |       | 200   | 550   | 54.20    |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ-P-05C 垂直转动弯通

XQJ-P-05C Tray type straight rotatable bend

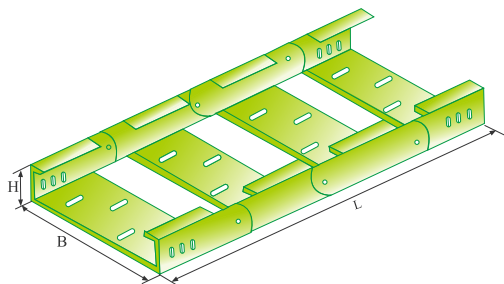

| 型号Model     | b(mm) | H(mm) | L(mm) | 重量Weight |
|-------------|-------|-------|-------|----------|
| P-05C-6-2   | 200   | 60    | 660   | 7.07     |
| P-05C-10-2  |       | 100   | 700   | 9.89     |
| P-05C-15-2  |       | 150   | 950   | 16.83    |
| P-05C-20-2  |       | 200   | 1150  | 20.20    |
| P-05C-6-3   | 300   | 60    | 660   | 8.25     |
| P-05C-10-3  |       | 100   | 700   | 11.51    |
| P-05C-15-3  |       | 150   | 950   | 19.25    |
| P-05C-20-3  |       | 200   | 1150  | 22.46    |
| P-05C-6-4   | 400   | 60    | 660   | 17.52    |
| P-05C-10-4  |       | 100   | 700   | 19.71    |
| P-05CB-15-4 |       | 150   | 950   | 32.22    |
| P-05C-20-4  |       | 200   | 1150  | 36.82    |
| P-05C-6-5   | 500   | 60    | 660   | 19.62    |
| P-05C-10-5  |       | 100   | 700   | 22.19    |
| P-05C-15-5  |       | 150   | 950   | 35.58    |
| P-05C-20-5  |       | 200   | 1150  | 40.03    |
| P-05C-6-6   | 600   | 60    | 660   | 22.19    |
| P-05C-10-6  |       | 100   | 700   | 24.96    |
| P-05C-15-6  |       | 150   | 950   | 37.85    |
| P-05C-20-6  |       | 200   | 1150  | 42.06    |
| P-05C-6-8   | 800   | 60    | 660   | 26.84    |
| P-05CB-10-8 |       | 100   | 700   | 29.61    |
| P-05C-15-8  |       | 150   | 950   | 45.95    |
| P-05C-20-8  |       | 200   | 1150  | 49.80    |

说明: 高度h=60, 100为单排连接孔, 高h=150为双排连接孔  
Description:h=60,single-row connection holes;h=150,double-row connection holes